

IP68 防水過路箱
IP68 Weatherproof Junction Box

M684



M685-T



M686-2



M686-3



M686-4



M686-5



M686-6




M686-T



M686-H




Standard : EN60670-22, EN60670-1
 Degree of Protection : IP68
 Max Depth : 4M
 Fireproof : 94V-2 Fire Retardant
 Operation Voltage : 450VAC
 Certification : TUV , CE & ROHS
 Material : Body PC / Cable Gland PA66 /
 Screw 304 Stainless Steel with Dacromet coating

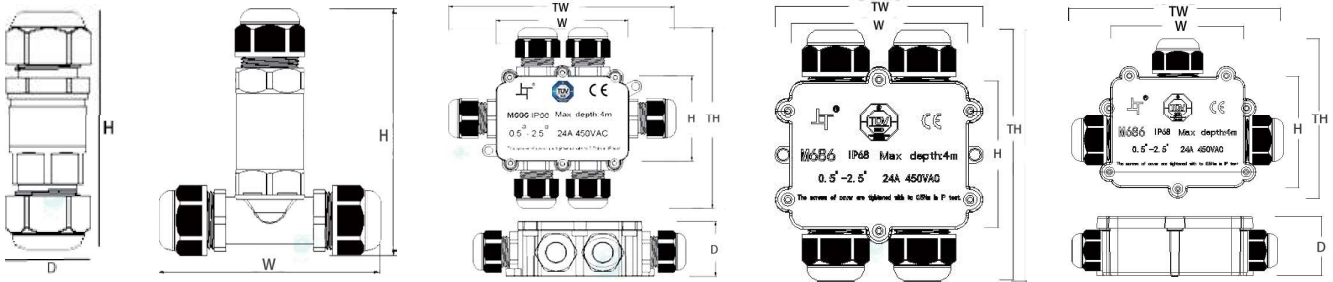

Model	Rated Current	No. of Cabel Gland	Cable Diameter	M68 Dimension				
				Body			Overall	
				W	H	D	TW	TH
M684	16A	M20 x 2	M20 : 5-9mm	/	76	22	/	/
M685	24A	M25 x 2	M25 : 10-14mm	/	113	32	/	/
M685-T	24A	M25 x 3	M25 : 4-8mm / 8-12mm / 10-14mm	96	107	/	/	/
M686-2	24A	M20 x 2	M20 : 5-9mm / 9-12mm PG9 : 4-8mm	70	42	36	134	100
M686-3	24A	M20 x 2 PG9 x 1	M20 : 5-9mm / 9-12mm PG9 : 4-8mm	81	52	36	134	100
M686-4	24A	M20 x 2 PG9 x 2	M20 : 5-9mm / 9-12mm PG9 : 4-8mm	81	52	36	134	100
M686-5	24A	M20 x 2 PG9 x 3	M20 : 5-9mm / 9-12mm PG9 : 4-8mm	81	52	36	134	100
M686-6	24A	M20 x 2 PG9 x 4	M20 : 5-9mm / 9-12mm PG9 : 4-8mm	81	52	36	134	100
M686-T	24A	M25 x 3	M25 : 4-8mm / 8-12mm / 10-14mm	81	67	37	99	138
M686-H	24A	M25 x 4	M25 : 4-8mm / 8-12mm / 10-14mm	81	67	37	93	122

Standard : EN60998-1:2004, EN60998-2-1:2004
 Number of Terminals : 12 Way
 Ambient Temperature: 110°C
 Fireproof : 94V-2 Fire Retardant
 Certification : ENEC, TUV, VDE
 Material : Copper

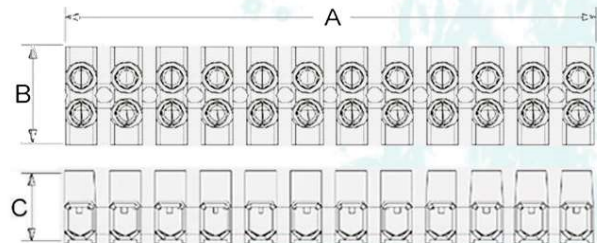

	Amp	Rated Voltage	Wire Range	Dimension (mm)			Packing (pcs)
				A	B	C	
PA8	17.5	450	0.5~2.5	95.8	18	13.3	50/bag 500/ctn
PA10	24	450	0.5~4	117.5	20	15.5	
PA12	41	500	2.5~6	139.5	24	18.5	