



IP67 Water Proof Industrial Plug / Coupler / Socket



Standard : EN60309-1:1999+A1:2007
 Degree of Protection : IP67
 No. of Pole : 1P+N+E or 3P+N+E
 Rated Current : 16A / 32A / 63A
 Rated Voltage : 110V / 220V / 380V



1P+N+E



3P+N+E




110V




220V




380V

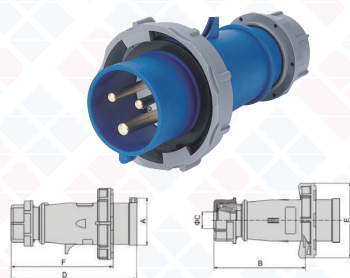

Type	Model	Current	Pole	Voltage	Dimension					
					A	B	C	D	E	F
PLUG 插頭	KB80132-4	16A	1P+N+E	110V	47	96.5	17	146	70	120
	KB80132	16A	1P+N+E	220V	47	96.5	17	146	70	120
	KB80152	16A	3P+N+E	380V	60	103	17	146	86	125
	KB80232-4	32A	1P+N+E	110V	63	121	24	180	92	145
	KB80232	32A	1P+N+E	220V	63	121	24	180	92	145
	KB80252	32A	3P+N+E	380V	70	121	24	185	101	150
	KB80352	63A	3P+N+E	380V	75.5	188	36.5	250	115	195

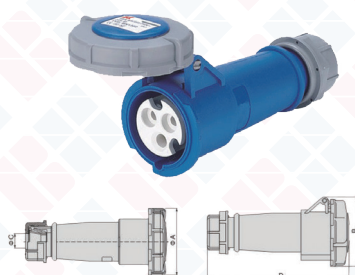

Type	Model	Current	Pole	Voltage	Dimension					
					A	B	C	D	E	F
COUPLER 耦合器 (中途插頭)	KB82132-4	16A	1P+N+E	110V	71	80	17	170	/	/
	KB82132	16A	1P+N+E	220V	71	80	17	170	/	/
	KB82152	16A	3P+N+E	380V	98	93	17	175	/	/
	KB82232-4	32A	1P+N+E	110V	94	98	24	210	/	/
	KB82232	32A	1P+N+E	220V	94	98	24	210	/	/
	KB82252	32A	3P+N+E	380V	101	105	24	220	/	/
	KB82352	63A	3P+N+E	380V	111	116	36.5	265	/	/

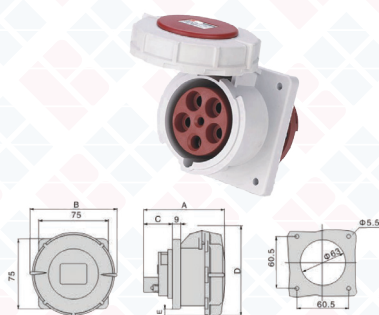

Type	Model	Current	Pole	Voltage	Dimension					
					A	B	C	D	E	F
SOCKET 盆面插座	KB83132-4	16A	1P+N+E	110V	89	71	30.5	89	75	63
	KB83132	16A	1P+N+E	220V	89	71	30.5	89	75	63
	KB83152	16A	3P+N+E	380V	89	88	31	92	75	63
	KB83232-4	32A	1P+N+E	110V	108	95	41	98	85	63
	KB83232	32A	1P+N+E	220V	108	95	41	98	85	63
	KB83252	32A	3P+N+E	380V	109	101	39	105	85	63
	KB83352	63A	3P+N+E	380V	134	111	35	115	100	73



Type	Model	Current	Pole	Voltage	Dimension		
					Length	Width	Height
WALL MOUNTED KIT 壁掛式套件	KB81132	16A	1P+N+E	110V	135	90	80
			220V				
			380V				
	KB81232	32A	1P+N+E	110V	135	90	85
			220V				
			380V				

Conductor Cross-sectional Area (mm²)
 from the smallest to the largest : 16A (1~1.5mm²) / 32A (4~6mm²) / 63A (10~16mm²)

